


Fire Sprinkler Overhead Process Flow

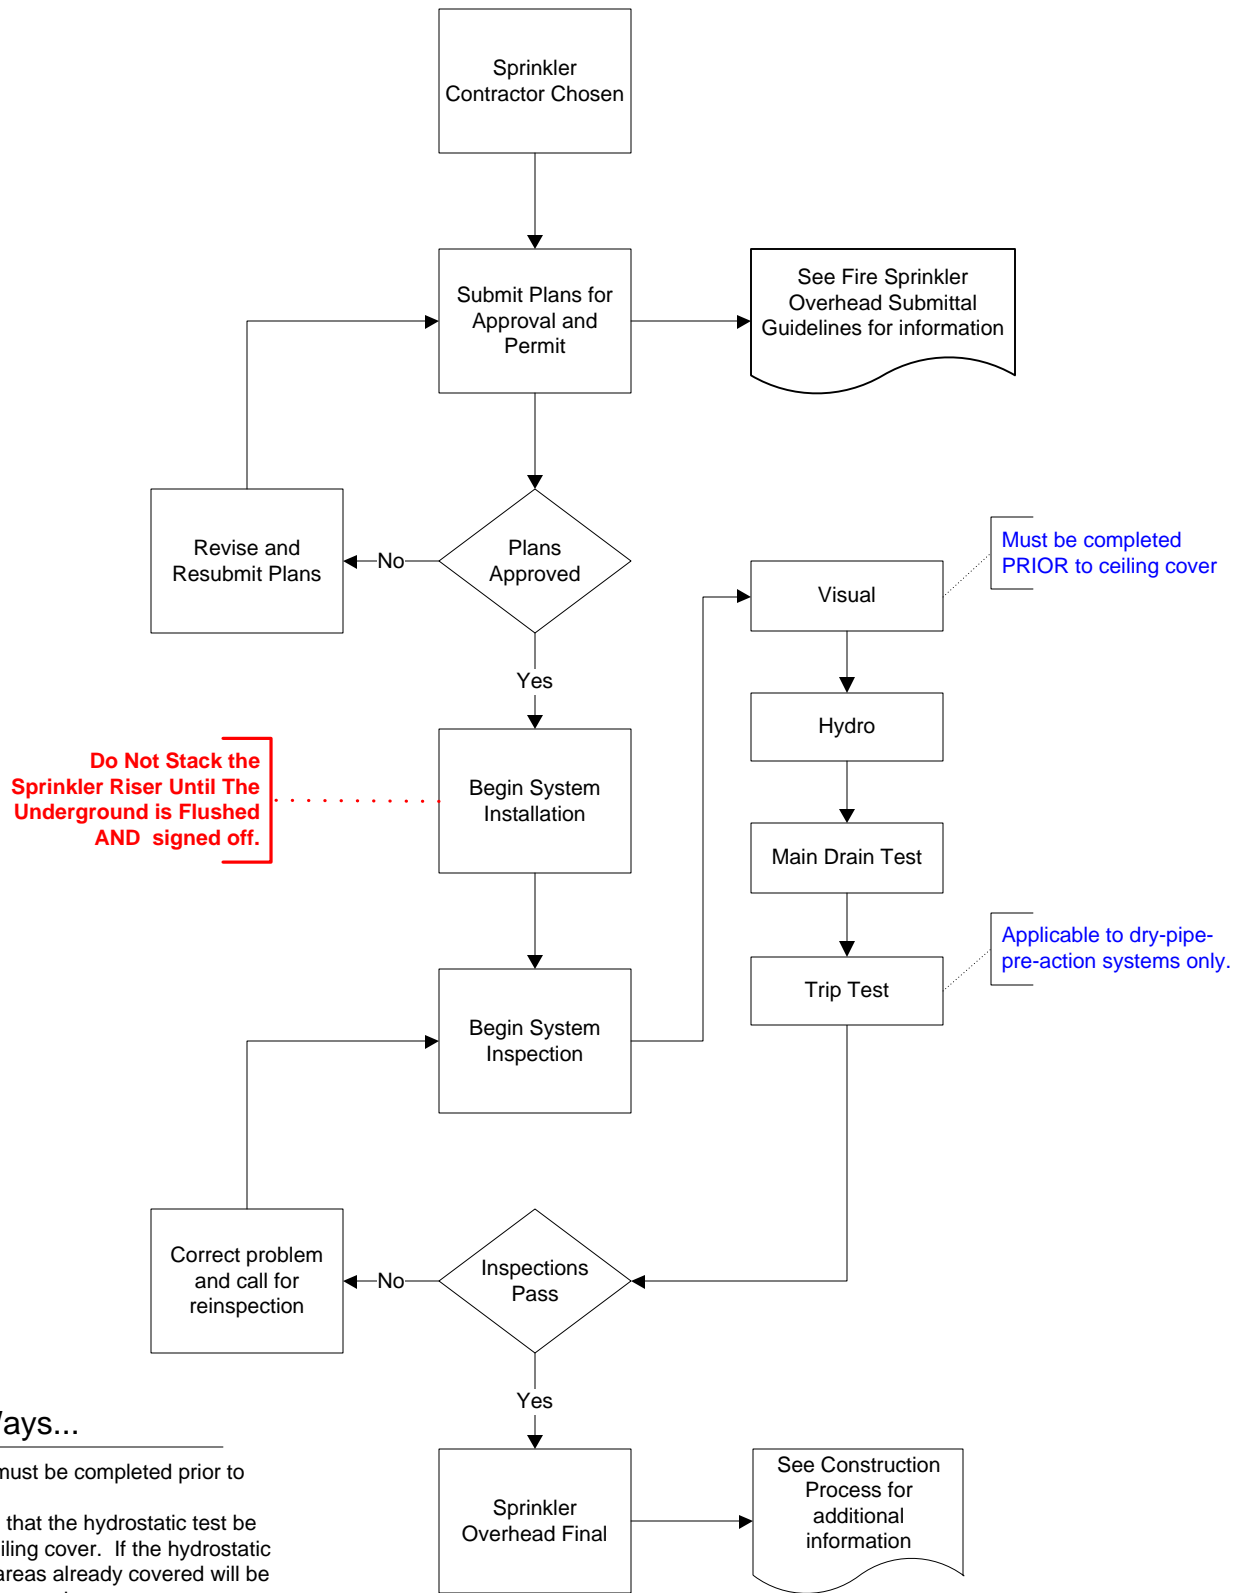

Oh, By The Ways...

1. Visual Inspection must be completed prior to ceiling cover.
2. It is recommended that the hydrostatic test be completed prior to ceiling cover. If the hydrostatic test fails, the ceiling areas already covered will be required to be uncovered.
3. Additional protection and/or changes may be Required based upon field inspection.